USER MANUAL

GOYA 25

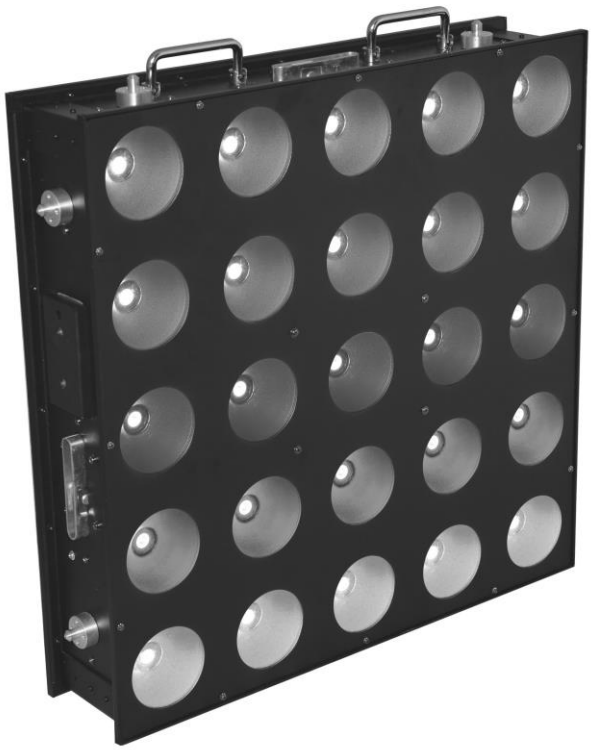

INTERNATIONAL

KEEP THIS MANUAL FOR FUTURE NEEDS CE

GENERAL GUIDELINES

Thanks for choosing GOYA 25.
This is the innovative LED application for professional lightings.
Since the RGB ultra bright LED lamps, the unit can combine more than 16.7 million soft color effects.

This device is a lighting effect for indoor professional use on stages, in discotheques, theatres, etc..
This fixture is only allowed to be operated with the max alternating current which stated in the technical specifications in this manual.

Lighting effects are not designed for permanent operation. Consistent operation breaks may ensure that the device will serve you for a long time without defects.

Do not shake the device. Avoid brute force when installing or operating the device.

While choosing the installation-spot, please make sure that the device is not exposed to extreme heat, moisture or dust. Please don't project the beam onto combustible substances. The minimum distance between light-output from the projector and the illuminated surface must be more than 3m.

If you use the quick lock cam in hanging up the fixture, please make sure the quick lock fasteners turned in the quick lock holes correctly.

Operate the device only after having familiarized with its functions. Do not permit operation by persons not qualified for operating the device. Most damages are the result of unprofessional operation.

Please use the original packaging if the device is to be transported.

For safety reasons, please be aware that all modifications on the device are forbidden.

If this device will be operated in any way different to the one described in this manual, the product may suffer damages and the guarantee becomes void. Furthermore, any other operation may lead to short-circuit, burns, electric shock, crash, etc..

SAFETY INSTRUCTIONS

Important safety warns

CAUTION!
Be careful with your operations.With a dangerous voltage you can Suffer a dangerous electric shock when touching wires!

This device has left the factory in perfect condition.
In order to maintain this condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual.

Important: Damages caused by the disregard of this user manual are not subject to warranty.
The dealer will not accept liability for any resulting defects or problems.

If the device has been exposed to temperature changes due to environmental changes, do not switch it on immediately. The arising condensation could damage the device.
Leave the device switched off until it has reached room temperature.
This device falls under protection-class I. It is essential that the device be earthed.
If protection screen, lens or ultraviolet screen in the fixture is apparently damaged or is damaged to exceed their own effective degree, such as cracked and gashed, it must be replaced.
The electric connection must carry out by qualified person.
Make sure that the available voltage is not higher than specified.
Make sure the power cord is never crimped or damaged by sharp edges.
If this would be the case, replacement of the cable must be done by an authorized dealer.
Always disconnect from the mains, when the device is not in use or before cleaning it. Only handle the power cord by the plug.
Never pull out the plug by tugging the power cord.
During initial start-up some smoke or smell may arise.
This is a normal process and does not necessarily mean that the device is defective, it should decrease gradually.
Please don't project the beam onto combustible substances.
If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

CAUTION!
Never touch the device during operation!
The housing may heat up

CAUTION!
Never look directly into the light source,
as sensitive persons may suffer an epileptic shock.

Please be aware that damages caused by manual modifications to the device are not subject to warranty. Keep away from children and non-professionals.

OPERATION INSTRUCTIONS

1) STATIC / BUILT-IN 13 RUNNING EFFECT
2) AUTO RUN
3) SOUND
4) MASTER / SLAVE
5) DMX MODE

- ***Built-in programs (P01-P14):***

STATIC COLOR CL:RGB Flash00-99	Red-Green-Blue-Yellow-Cyan-Purple-White Blackout & Flash speed adjustable.
DREAM Speed00-99 Flash00-99	Seven color dreaming Speed & Flash adjustable
METEOR Speed00-99 Flash00-99	Seven color flow Speed & Flash adjustable
FADE Speed00-99 Flash00-99	Seven color fade Speed & Flash adjustable
CHANGE Speed00-99 Flash00-99	Seven color change Speed & Flash adjustable
FLOW 1 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable
FLOW 2 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable
FLOW 3 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable
FLOW 4 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable
FLOW 5 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable
FLOW 6 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable
FLOW 7 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable
FLOW 8 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable
FLOW 9 Speed00-99 Flash00-99	Seven color chase Speed & Flash adjustable

- ***Auto Run mode (14 built-in modes together):***
  FQN01-99 (Frequency adjustable)
- ***SLAVE Mode:***
  Link the units and press MODE button of the Slave units to SLAVE mode.
  Then the slave units will follow running in accordance with the Master unit.
- ***Sound Mode:***
  Press MODE button to show: SOUND MODE SENS:00-31 FQN:01-99

- ***DMX Mode:***

  3CH: Every 25 leds as 1 section

  5CH: Every 25 leds as 1 section

  75CH: Every 1 led as 1 section, totally 25 sections

  78CH: Every 1 led as 1 section, totall 25 sections

3 channel mode:

Channel:	Value:	Function:
1	000-255	Red (0-100%)
2	000-255	Green (0-100%)
3	000-255	Blue (0-100%)

5 channel mode:

Channel:	**Value:**	**Function:**
1	000-255	Red (0-100%)
2	000-255	Green (0-100%)
3	000-255	Blue (0-100%)
4	000-255	Master dimmer (0-100%)
5	000-000	ON
	001-005	Sound control (7 colors)
	006-010	ON
	011-255	Strobe (increasing)

75 channel mode (Every 1 led as 1section, the fixture has 25 sections totally):

CH 1	**CH 2**	**CH 3**	**CH 4**	**CH 5**	**CH 6**	**CH 7**	**CH 8**	**CH 9**	**CH 10**	**CH 11**	**CH 12**	**CH 13**	**CH 14**	**CH 15**	**CH 16**	**CH 17**	**CH 18**	**CH 19**	**CH 20**	**CH 21**	**CH 22**	**CH 23**	**CH 24**	**CH 25**
R 1	**G 1**	**B 1**	**R 2**	**G 2**	**B 2**	**R 3**	**G 3**	**B 3**	**R 4**	**G 4**	**B 4**	**R 5**	**G 5**	**B 5**	**R 6**	**G 6**	**B 6**	**R 7**	**G 7**	**B 7**	**R 8**	**G 8**	**B 8**	**R 9**
CH 26	**CH 27**	**CH 28**	**CH 29**	**CH 30**	**CH 31**	**CH 32**	**CH 33**	**CH 34**	**CH 35**	**CH 36**	**CH 37**	**CH 38**	**CH 39**	**CH 40**	**CH 41**	**CH 42**	**CH 43**	**CH 44**	**CH 45**	**CH 46**	**CH 47**	**CH 48**	**CH 49**	**CH 50**
G 9	**B 9**	**R 10**	**G 10**	**B 10**	**R 11**	**G 11**	**B 11**	**R 12**	**G 12**	**B 12**	**R 13**	**G 13**	**B 13**	**R 14**	**G 14**	**B 14**	**R 15**	**G 15**	**B 15**	**R 16**	**G 16**	**B 16**	**R 17**	**G 17**
CH 51	**CH 52**	**CH 53**	**CH 54**	**CH 55**	**CH 56**	**CH 57**	**CH 58**	**CH 59**	**CH 60**	**CH 61**	**CH 62**	**CH 63**	**CH 64**	**CH 65**	**CH 66**	**CH 67**	**CH 68**	**CH 69**	**CH 70**	**CH 71**	**CH 72**	**CH 73**	**CH 74**	**CH 75**
B 17	**R 18**	**G 18**	**B 18**	**R 19**	**G 19**	**B 19**	**R 20**	**G 20**	**B 20**	**R 21**	**G 21**	**B 21**	**R 22**	**G 22**	**B 22**	**R 23**	**G 23**	**B 23**	**R 24**	**G 24**	**B 24**	**R 25**	**G 25**	**B 25**

78 channel mode (Every 1 led as 1section, the fixture has 25 sections totally) :

<table>
<tr><td>CH1</td><td>CH2</td><td>CH3</td><td>CH4</td><td>CH5</td><td>CH6</td><td>...CH78</td></tr>
<tr><td>0-15</td><td>Master dimmer</td><td rowspan="25">Flash
（0-255）
Slow to fast</td><td>R (0-255）</td><td>G（0-255）</td><td>B（0-255）</td><td>...CH78（0-255）</td></tr>
<tr><td>16-23 R</td><td>dimmer</td><td colspan="4" rowspan="24"></td></tr>
<tr><td>24-31 G</td><td>dimmer</td></tr>
<tr><td>32-39 B</td><td>dimmer</td></tr>
<tr><td>40-47 RG</td><td>dimmer</td></tr>
<tr><td>48-55 GB</td><td>dimmer</td></tr>
<tr><td>56-63 RB</td><td>dimmer</td></tr>
<tr><td>64-71 RGB</td><td>dimmer</td></tr>
<tr><td>72-79 Color 1</td><td>dimmer</td></tr>
<tr><td>80-87 Color 2</td><td>dimmer</td></tr>
<tr><td>88-95 Color 3</td><td>dimmer</td></tr>
<tr><td>96-103 Color 4</td><td>dimmer</td></tr>
<tr><td>104-111 Color 5</td><td>dimmer</td></tr>
<tr><td>112-119 Color 6</td><td>dimmer</td></tr>
<tr><td>120-127 Color 7</td><td>dimmer</td></tr>
<tr><td>128-135 Color 8</td><td>dimmer</td></tr>
<tr><td>136-143 DREAM</td><td rowspan="14">speed
（0-255）
Slow
to
fast</td></tr>
<tr><td>144-151 METEOR</td></tr>
<tr><td>152-159 FADE</td></tr>
<tr><td>160-167 CHANGE</td></tr>
<tr><td>168-175 FLOW1</td></tr>
<tr><td>176-183 FLOW2</td></tr>
<tr><td>184-191 FLOW3</td></tr>
<tr><td>192-199 FLOW4</td></tr>
<tr><td>200-207 FLOW5</td></tr>
<tr><td>208-215 FLOW6</td></tr>
<tr><td>216-223 FLOW7</td></tr>
<tr><td>224-231 FLOW8</td></tr>
<tr><td>232-239 FLOW9</td></tr>
<tr><td>248-255 SOUND</td><td>sensitivity（0-255)</td><td colspan="4"></td></tr>
</table>

CLEANING AND MAINTENANCE

The following points have to be considered during the inspection:

1) All screws for installing the devices or parts of the device have to be tightly connected and must not be corroded.
2) There must not be any deformations on the housing, color lenses, fixations and installation spots (ceiling, suspension, trussing).
3) Mechanically moved parts must not show any traces of wearing and must not rotate with unbalances.
4) The electric power supply cables must not show any damage, material fatigue or sediments.

Further instructions depending on the installation spot and usage have to be adhered by a skilled installer and any safety problems have to be removed.

CAUTION!

Disconnect from mains before starting maintenance operation.

We recommend a frequent cleaning of the device. Please use a moist, lint- free cloth.
Never use alcohol or solvents.
There are no serviceable parts inside.
Should you need any spare parts, please order genuine parts from your local dealer.
Please refer to the instructions under installation.

TECHNICAL SPECIFICATIONS

·LED: 25X30W RGB
·Beam angle: 60°
·Power: 750W
·Voltage: AC100V-250V. 60Hz-50Hz
·Fuse: F4A, 250V
·DMX control: 3/5/75/78 channels modes
·Master and slave control
·LCD display (Mode, Set up, Up, Down)
·Size: 550x130x550
·N.W.: 15kg (excluded hanging bracket)

Note: All information are subject to change without prior notice.